

## Affordable Color Label Printing In a Compact Form

### The perfect choice for small businesses.

The VP600 has been engineered for high performance while priced within reach of small to medium enterprises. Manufacturers struggling with the high cost of purchasing pre-printed labels and wastage associated with label design changes, damaged or obsolescence, will find the VP600 the must have printer.

With it's ease of use and superb image quality, the VP600 is the ideal choice for customers needing to print roll to roll, fanfold or tag stocks. The VP600 is the printer that will help get your products to retailers much quicker. It's time to "Get your labels printed your way, on your schedule and in the quantities you need".



### Suitable for



Food & Beverage



Healthcare &  
Nutraceuticals



Logistics




Manufacturing



Retail



Small/Medium  
Enterprise

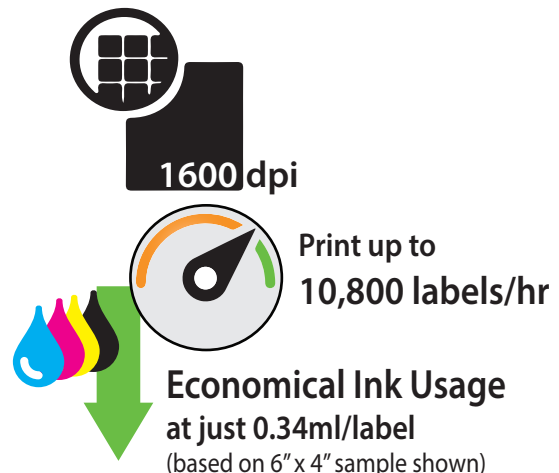

# Specifications

## GENERAL

<b>Print Speed</b>	6 and 8 ips (152.4 and 203.2 mm/s)
<b>Print Resolution</b>	1,600 x 1,600 dpi and 1,600 x 800 dpi
<b>Print Width</b>	2" - 8.5" (50.8 - 215.9 mm)
<b>Communication</b>	USB 2.0, 10/100Base-T
<b>Inks</b>	Dye Ink in 5 individual 200ml CYMCK color
<b>Time to First Label</b>	Less than 10 seconds
<b>Dimensions (Printer)</b>	20.1" (W) x 11.2" (H) x 15.2" (D) (510 x 285 x 385 mm)
<b>Weight (Printer Only)</b>	66 lbs (30 kg)

## PRINTING

<b>Print Modes</b>	Roll-to-Cut, Roll-to-Roll, Print & Hold
<b>Barcode PQ</b>	1D Barcode ≥ Grade B (Code 39) with 10 mils bar width 2D Barcode ≥ Grade B (PDF417) with 10 mils cell size


## OPERATION

<b>Electrical</b>	Universal power supply - 100 - 240 Vac, Peak current < 4A
<b>Operating Temperature</b>	15 to 35°C at RH 20 - 80%
<b>Storage Temperature</b>	-5 to 50°C
<b>Standards/Approvals</b>	FCC Part 15, Subpart B, Class A (US) IEC 60950-1 Compliance (International), cULus (US/Canada), CCC (China), RCM (Australia)
<b>User Interface</b>	Embedded web server Blacklit LCD control panel in 9 languages LED for Printer warnings and readiness indication Unobstructed accessibility to service bays for print head and ink tanks Designed for ease of setup, troubleshooting and service

## MEDIA

<b>Sensor Type</b>	Gap, Reflective sensor for black mark
<b>Media Types</b>	Roll (Continuous, Die-cut), Fan-fold
<b>Media Thickness</b>	0.1 - 0.3 mm
<b>Roll Diameter</b>	6" (152 mm) OD with 3" Core (76.2 mm)
<b>Supported Media</b>	Glossy, Matte, Synthetic
<b>Media Length</b>	Up to 40" (1,016 m)
<b>Construction</b>	Metal casing with industrial grade ruggedness
<b>What's in the Box</b>	Printer (Integrated Un-winder), print head, ink cartridges, USB Cable and AC power cable
<b>Built-in accessory</b>	Automatic Cutter, Label Print and Hold
<b>Warranty</b>	1 Year limited warranty or 5 Million inches, whichever comes first

## Overview

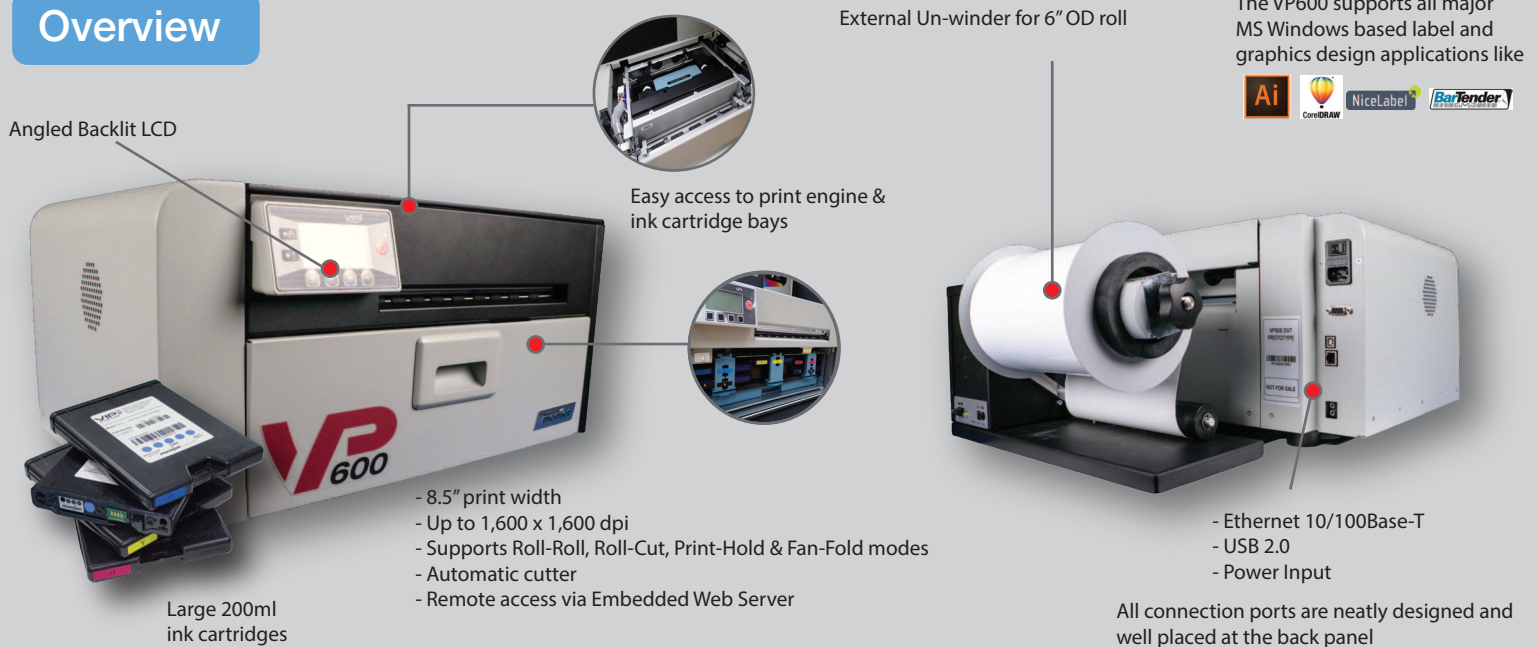

Angled Backlit LCD

External Un-winder for 6" OD roll

Easy access to print engine & ink cartridge bays

Large 200ml ink cartridges

- 8.5" print width
- Up to 1,600 x 1,600 dpi
- Supports Roll-Roll, Roll-Cut, Print-Hold & Fan-Fold modes
- Automatic cutter
- Remote access via Embedded Web Server

The VP600 supports all major MS Windows based label and graphics design applications like

Ai CoreDRAW NiceLabel BarTender


- Ethernet 10/100Base-T
- USB 2.0
- Power Input

All connection ports are neatly designed and well placed at the back panel


## Accessories

For more information, please visit us at [www.vipcolor.com](http://www.vipcolor.com)

### Re-winder/Un-winder



### Label Slitter



### Matrix Remover & Slitter

